





Series T

Material: polyamide 6.6
Colours: natural - black
Operating temperatures: -40 to +85°C
 (+150°C short time)
Melting point: +260°C
Serrations: inside serrations
Ultimate elongation: 60 %
Dielectric strength: 27 kV/mm
Flame resistance: V2 UL94
Application: cable ties with mounting hole for particular indoor use. Screw fixing.

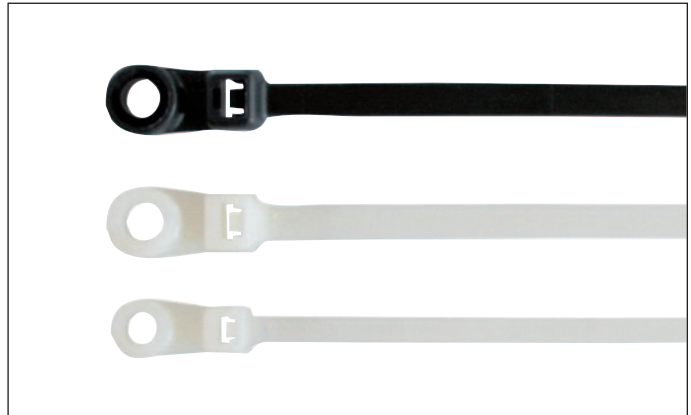

type	article number		dimensions length x width mm	maximum bundle Ø mm	tensile strength mini (daN)	hole Ø mm	
	natural (NL)	black (BK)					
110/25 T-C	0186 0780 018	-	110 x 2,5	18	8	3,2	100
150/36 T-C	0186 0790 018	-	150 x 3,6	32	13	4,5	100
200/48 T-C	0186 0800 018	0186 0800 010	200 x 4,8	50	22	5,5	100
380/76 T-C	0186 0810 018	-	380 x 7,6	100	54	6,2	100

